


Stainless Steel Tops

Specifications

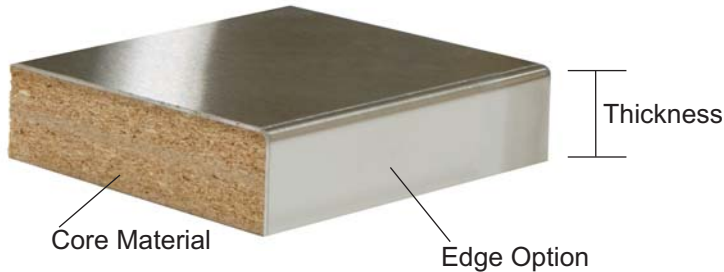

Thickness- 1-5/8"

Finish- 16-gauge, type 304, #4 finish

Sizes- Up to 48" x 144"

Core- Industrial grade particle board (bottom side exposed)

Edge Options- Wrapped and welded, wrapped with front drip edge or vinyl T-mold

Optional Custom Finishes- Electro-polishing, embossing or laser etching

Field Installation

All tops over 60" must have some type of support in addition to the legs to prevent bowing. Any tops over 36" in length will have dado cuts on the bottom side of the core to prevent warping.

Drilling- Fasteners with a deep thread are recommended. Predrilling the holes are recommended. Take into consideration the thickness of the top when selecting the screw length.

General Care & Maintenance

Wash with soap or a mild detergent and warm water followed by a clean water rinse. An enhanced appearance will be achieved if the cleaned surface is wiped dry. Follow polish lines.

For slight scratches use impregnated nylon pads. Stainless steel and "Scotch-brite" scouring pads are satisfactory. Do not use steel wool. Follow polish lines.

Information subject to change without notice.

Fastener and Pilot Hole Chart

Screw Size #	Pilot Hard Wood
4	1/16"
6	5/64"
8	3/32"
10	7/64"
12	1/8"



800-242-2303

www.wibench.com