


lobo tables

1-1/4" MDF core with High Pressure Laminate and phenolic backer offers superior strength. The Lotz® Armor Edge is extremely durable and will not separate from the MDF core.

The apron frame is 16 gauge 1-1/4" x 2" steel tube. The steel frame is TIG welded using a 10 gauge reception plate with (2) - 1/4" holes drilled for leg mounting. The frame has welded tabs at preset locations used for fastening the apron frame to the bottom of the table top. The apron frame is attached to the top prior to shipping.

The legs for the LOBO Series are 1-1/4" square 14-gauge tube with (2) machined fine thread 1/4-20 screw receptacle holes for attachment to the apron. The upper portion of the leg has a 1" square tube (tube in tube) welded into the 1-1/4" tube, for increased screw holding power and security of attachment. The lower portion of the leg is fitted with a non-mar adjustment glide with a 3/8"-16 stud with a 1" travel path. Standard fixed leg is 28-1/4" high.

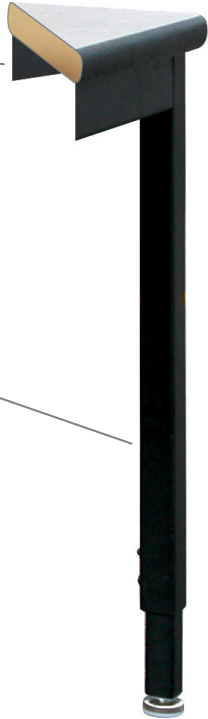

Your Table. Your Choice.



800.242.2303
wibench.com

lobo tables

Top:

High pressure laminate is bonded to a MDF (medium density fiberboard) core. MDF is a superior material for screw holding abilities exceeding 250 lbs., breaking strength and load tests. The phenolic backer prevents moisture penetration to the core material. The sprayed on edging is Wisconsin Bench's Lotz Armor Edge®, a Polyurea, which is extremely strong and durable. This edge will not separate from the MDF core material.

LOBO Frame:

Apron Frame: The solid steel Apron frame is 1-1/4" x 2", 16 gauge steel that is TIG welded using a 10 gauge reception plate with (2) 5/16" holes drilled for leg mounting. The frame has welded tabs at preset locations used for fastening the apron frame to the back of the table top. This apron frame is attached to the top prior to shipping.

Legs:

The legs for the LOBO Series are 1-1/4" square 14 gauge tube with two (2) machined coarse thread 1/4-20 screw receptacle holes for attachment to the apron. The upper portion of the leg has a 1" square tube (tube in tube) welded into the 1-1/4" tube, for increased screw holding power and security of attachment. The length of the inside tube is 2". The lower portion of the leg is fitted with a non-mar adjustment glide with a 3/8"-16 stud with a 1" travel path. Standard fixed legs are 28-1/4" high. The adjustable leg option has a 1-1/4" square 16 gauge tube with two (2) punch holes for positive contact and safety with adjustability. This lower leg section is fabricated to fit into the upper leg assembly. The legs can adjust from 22-1/4" to 36-1/4", these adjustments are made through (2) points on a screw plate and screwed into the punch holes of the lower leg, the screws are Allen head screws with 1/4-20 thread.

Paint:

The Apron Frame and the Leg Assembly are powder coated with a polyester texture black finish to 3mil in thickness as standard.

Your Table. Your Choice.

CUSTOM FIT

800.242.2303

wibench.com